BLINKTROLL | MOVING TARGET







FLEXIBLE DESIGN

BlinkTroll runs back and forth on a simple rope, so changing location is fast and uncomplicated

BlinkTroll can be controlled using a smartphone, you can choose between several automated modes the BlinkTroll concept is flexible not just in use but at the very core of its nature.





SPECIFICATION

EASY SETUP

Lightweight
Runs on 6-10mm steel wire or static line
Speeds – 0.2 – 3.5 m/s
Carrying capacity up to 6kg



REMOTE CONTROL VIA APP

Connects app to BlinkTroll using WiFi Start and stop sequences on app

Available for Android (iOS app in development)

- Pre-installed Android mobile device available [mobile or tablet]
- Range: 100 meters 100-1500m+ with range extender

INTERCHANGEABLE BATTERY PACKS

Easy battery mount and change Operation time – 2 hours per battery charge

WEATHER RESISTANT

Temperature range

- -10 C +40 C
- Operates in rain and snow
- Wind stability depending on attached target design

LIGHTWEIGHT MODULAR DESIGN

Lightweight alu-frame Low ricochet risk Interchangeable parts for easier maintenance and overhaul


CUSTOM FLIGHTCASE

BlinkTroll is delivered in a compact and robust flightcase with custom inserts. Perfect for field, safe storage and travelling.



CONFIGURABLE TARGETS

With a carrying capacity of up to 6kg, the BlinkTroll can be used with a steel target, cardboard cutouts or archery targets



REMOTE CONTROLLED

The BlinkTroll is controlled using a smartphone or a tablet.







BLINKTROLL RECOMMENDED INDOOR RANGE SETUP

50 m indoor range 20 m wire span 5 m to ceiling

Wire #1 1,0 m from bullet trap Wire #2 6,0 m from bullet trap Wire #3 11,0 m from bullet trap

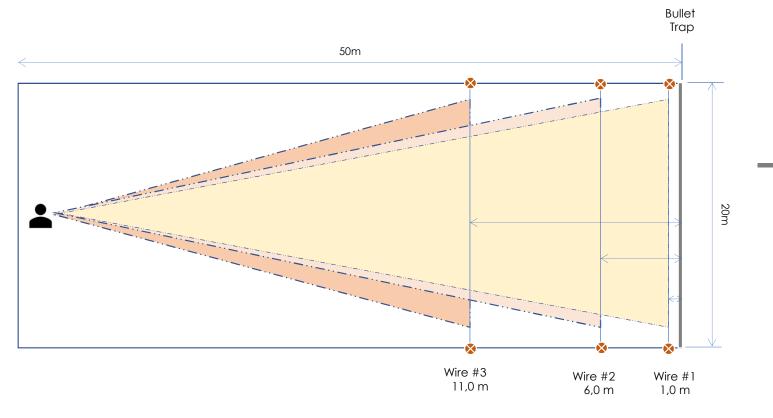







BLINKTROLL RECOMMENDED INDOOR RANGE SETUP

Multiple BLINKTROLL setup

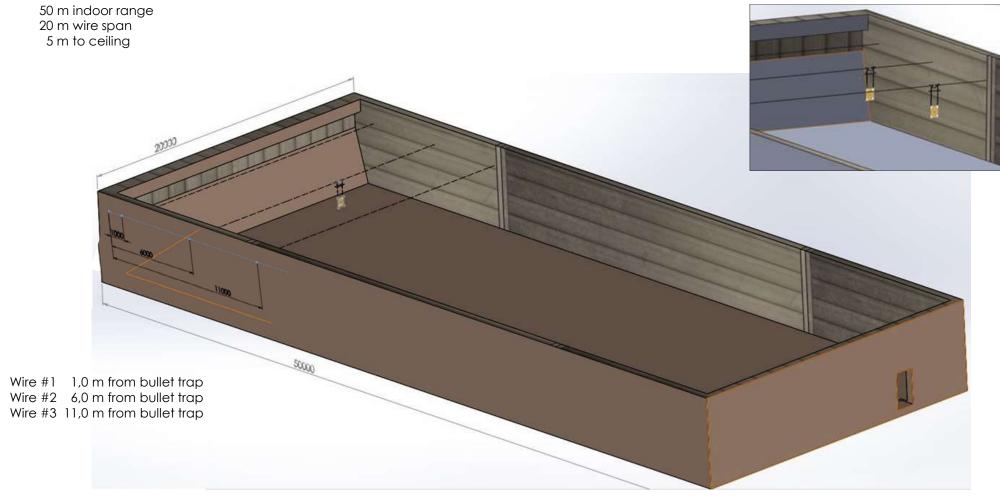



BLINKTROLL RECOMMENDED OUTDOOR RANGE SETUP

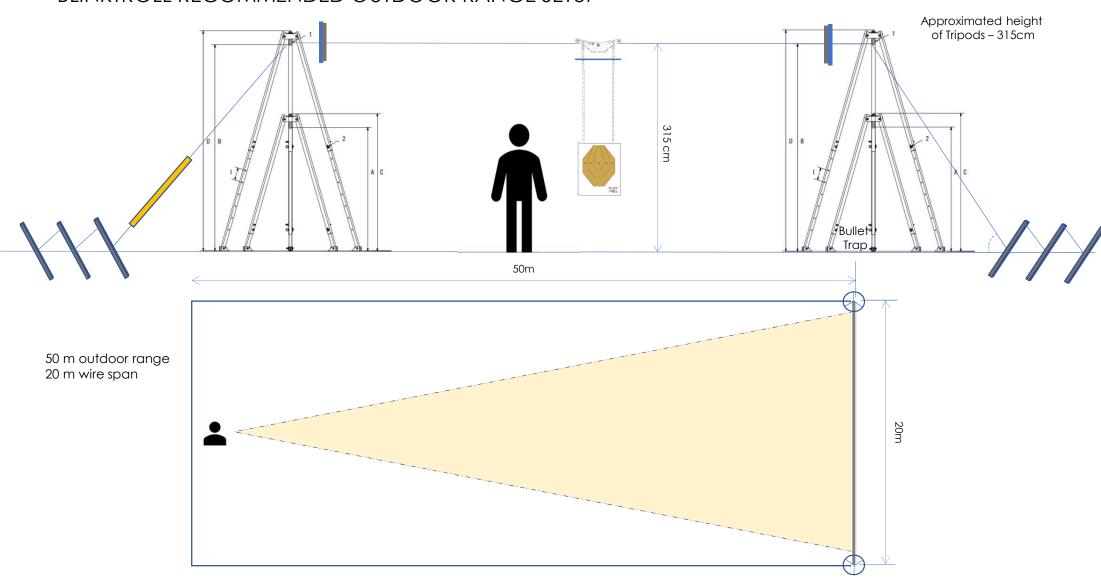

BLINKTROLL OUTDOOR RANGE SETUP – FIXED POLE SETUP

